

KMIDam is the Kinemetrics Management of Infrastructure system may consist of a Data Center combined with a network of smart, IP-ready Seismic Stations. These high performance and compact accelerographs leverage the latest technology to deliver maximum flexibility and scalability. They can be operated as standalone free field stations or as a network of several stations that are linked via wireless technology for common trigger. They can be configured as real-time or event triggered systems.



The data center provides information to an operator in real-time or on demand. The basic KMIDam System consists of: Four 3-channel accelerographs:

Dam foundation Crest Abutment Free field station

Real-Time Monitoring System

SMA REPORT automatic strong motion event analysis

Main Benefits

Policy Makers - Improve safety mandates

Owners - Save Money by reducing downtime

Facility Managers - Better manage decisions and save life and property

Nearby residents - Increase confidence in safety

Operators - Receive immediate status on Dam safety and functionality

Free-Field

Peak: 2.37

Peak: 0.30

Peak: 9.71

Engineers - Receive immediate status on network condition

Main Features

Command & Control of seismic stations


Real-Time FFT

Earthquake Location

Alarm System Notification

Automatic Processing for Reporting

Basic System

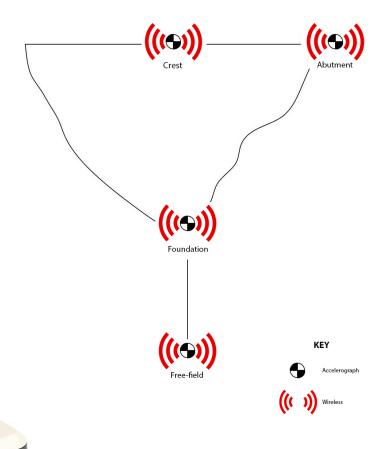

222 Vista Ave., Pasadena, CA 91107 USA Telephone: +1-626-795-2220 Fax: +1-626-795-0868

E-mail: sales@kmi.com

Crest

0.2

Acceleration (g) 0.1 0 -0.1

Velocity (cm/s) -5

Displacement (cm)

www.kinemetrics.com

Available KMIDam Instruments

ETNA 2, Obsidian, Episensor, ES-T, Hyposensor and Antelope